

# SPACE

**Sectional and counterweight spring doors  
up to 16m<sup>2</sup>**

**Reinforced belt with  
steel core**

**Two channel encoder**

**Standard rail with interlocking  
system 3200mm (art. AB16)**

**Quick opening (17cm/s) and  
very silent, thanks to the  
steel track with belt**

**Integrated courtesy light**



## **NETLINK OPERATOR**

This operator is compatible with the NETLINK System and can be programmed with DEAIInstaller and NETBOX





Compatible with the Apps



**KIT**

## 24V $\Rightarrow$ operators with control board and encoder




COD.	Art.					OTHER CHARACTERISTICS
636007	SPACE	✓	600N		NET724N	<ul style="list-style-type: none"> <li>• Motor with 2 channels encoder</li> <li>• Integrated control board with receiver for up to 100 remote controls</li> <li>• 3 steps simplified programming</li> <li>• Quick connection of the motor to the track</li> <li>• Continuous adjustment of stroke and forces</li> <li>• Secured programming procedure</li> </ul>
636100	SPACE/L	✓	800N		NET724N/XL	
636015	SPACE/XL	✓	1200N		NET724N/XL	
636016	SPACE/XXL*	✓	1200N		NET724N/XL	

For all models: control panel and 1 transmitter art. GT14 included. Track not included.

\* SPACE/XXL: art. AB/FM included

## Steel track with belt:




COD.	Art.	CHARACTERISTICS
636090	AB16	Steel track with belt, 2 pcs, 1.600+1.600 mm SPACE series: useful stroke: 2.668 mm
636093	AB20*	Iron track with belt, 2 pcs, 2.000 + 2.000 mm SPACE series: useful stroke: 3.468 mm


\*Recommended: to use with art. AB/BACKET cod. 639381

TECHNICAL INFO	SPACE	SPACE/L	SPACE/XL	SPACE/XXL
Motor power supply (V)	24V $\Rightarrow$			
Maximum power absorption (W)	100	120	180	230
Max thrust (N)	600	800	1200	1200
Duty cycle (cycles/hours)	20	25	25	35
N. max cycles in 24h.	60	75	75	350
Operating temperature (°C)	-20 ÷ 50			
Speed (cm/s)	17		16	13
Weight with packing (Kg)	5			6
Sound pressure (dBA)	< 70			
Protection level	IP20			

## EXAMPLE OF A TYPICAL INSTALLATION

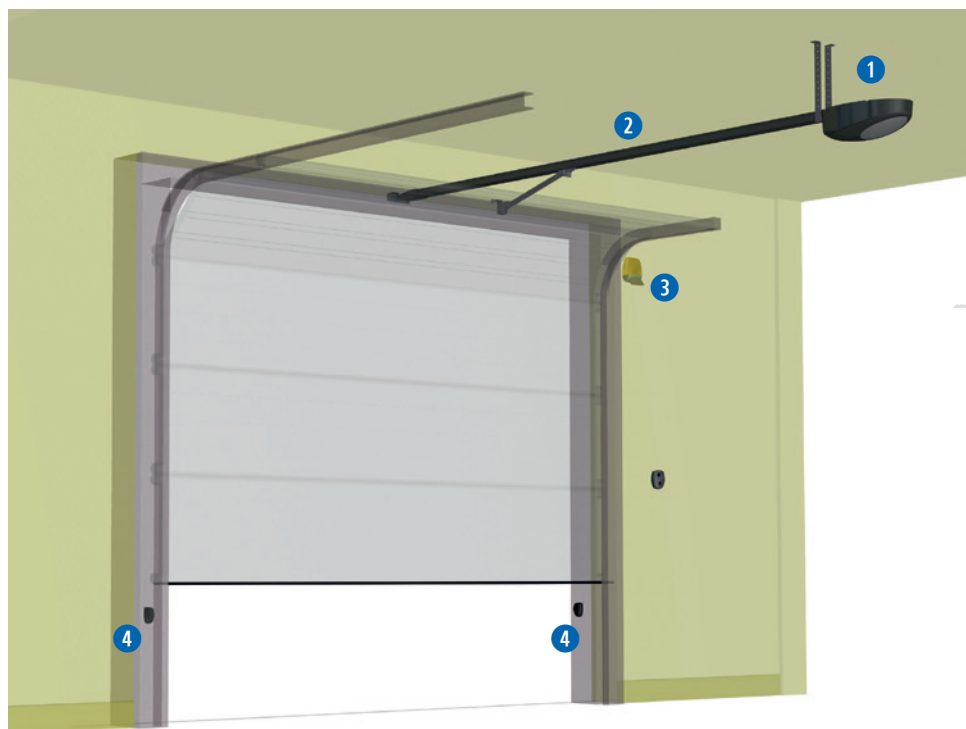

### DIMENSIONS

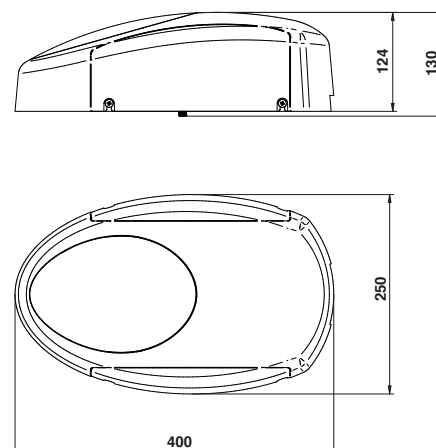

**KIT**

**1**

**1 operator SPACE - 24V**

**KIT**

**2**

**COD. 636090**  
**Art. AB16**  
Iron track with belt, 2 pcs., 1600 + 1600 mm, stroke 2776 mm

**KIT**

**COD. 672645**  
**Art. GTI4**  
Serialized white 4-channel remote control, 433 MHz, with 3 coding: HCS Rolling-Code, Dip-Switch and new D.A.R.T. coding

**4**

**COD. 662080**  
**Art. LINEAR/XS**  
Pair of mini synchronizable photocell for outdoor installation. Maximum range 20m

**3**

**COD. 661083**  
**Art. AURA24**  
24V flashing light, LED, with integrated antenna, 433 MHz

**KIT**

for further details on the kits see price list 2019

## SPECIFIC ACCESSORIES

**COD. 639381**  
**Art. AB/BACKET**  
Fixing plate set for track

**COD. 639382**  
**Art. AB/FM**  
Mechanical stop in opening position for track with belt. Compulsory usage with "Electronic positioning brake" function enabled

**COD. 639301**  
**Art. AB/EXTENSION**  
1600mm extension for steel track art. AB16 complete with joint and 9450 mm full belt

**COD. 639350**  
**Art. 723**  
Arm adaptor for sectional doors

**COD. 639321**  
**Art. 721/AB**  
Unlocking device by cable (4m). To be used with art. BLINDOS

**COD. 639340**  
**Art. 722**  
Arm to be used with counterweight doors

**COD. 639371**  
**Art. 761C**  
Unlocking device by cable complete with hole cover lock

**COD. 639372**  
**Art. 762C**  
Unlocking device by cable with lock

**COD. 179006**  
**Art. 240E**  
Supplementary antenna for SPACE operators

**COD. 665000**  
**Art. BLINDOS**  
Aluminium safety enclosure, with European cylinder, ready for unlocking device by cable.

**COD. 639322**  
**Art. 721D**  
External unlocking device for ADVANCE/SPACE